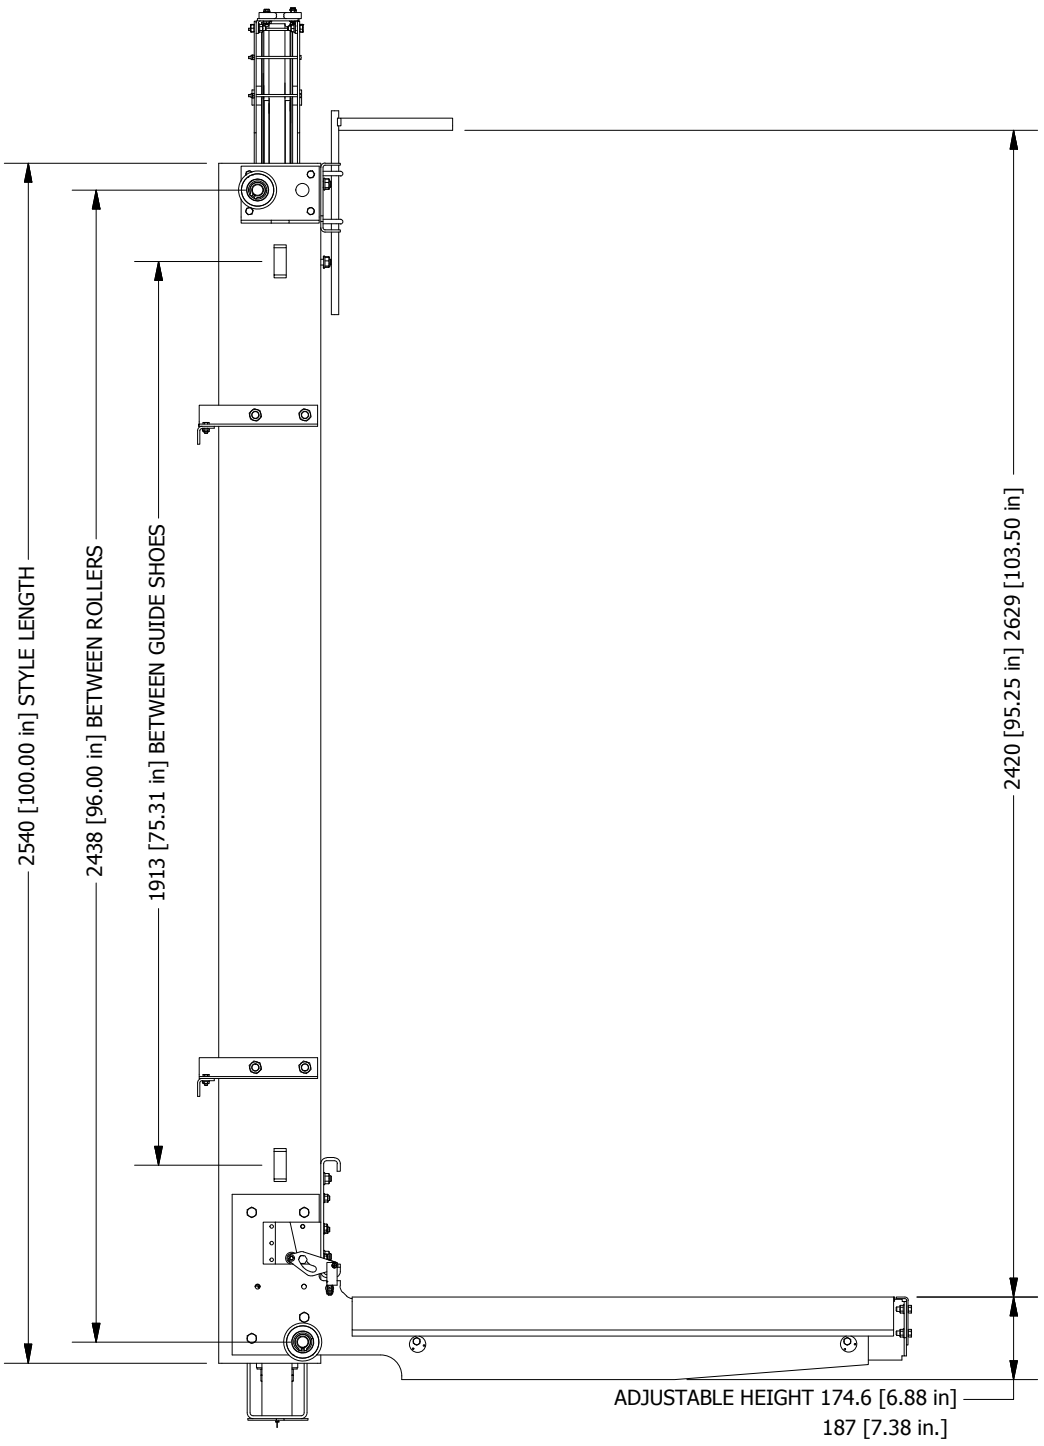

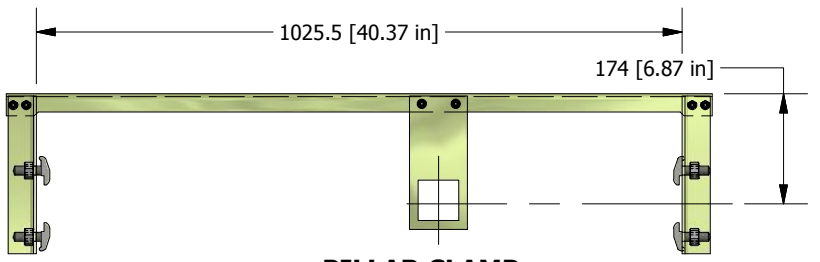

PILLAR CLAMP

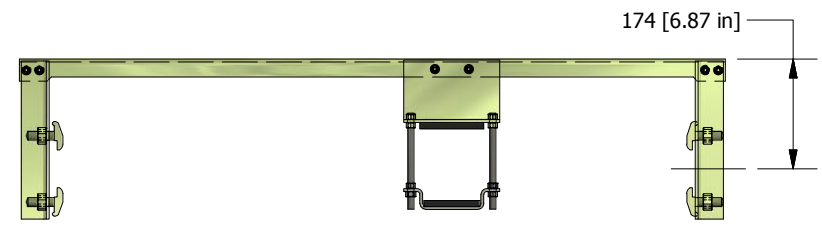

JACK CLAMP

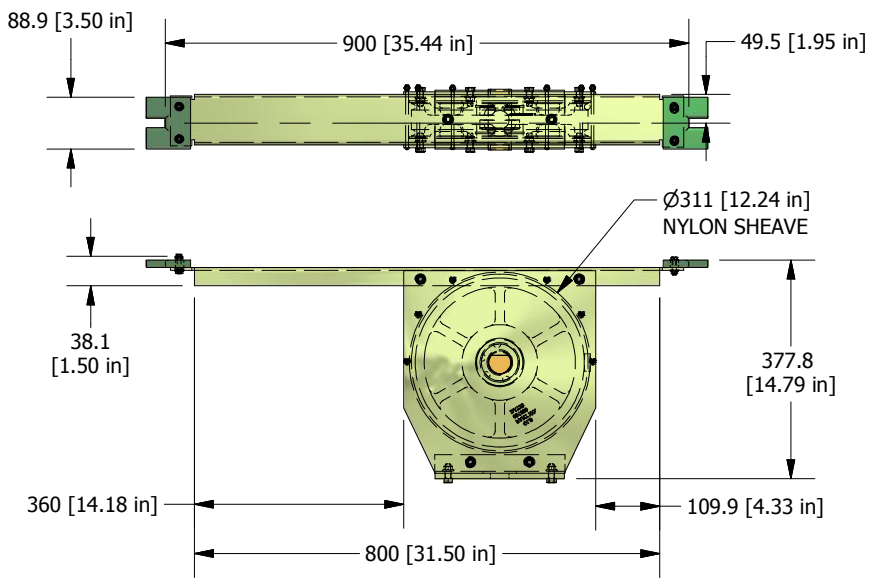

SHEAVE

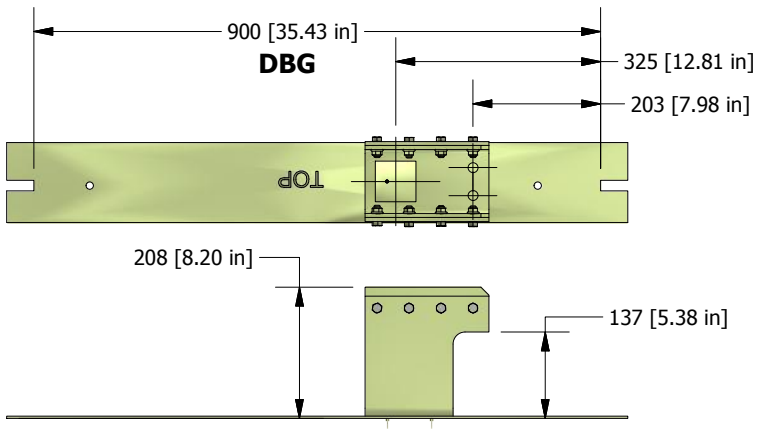

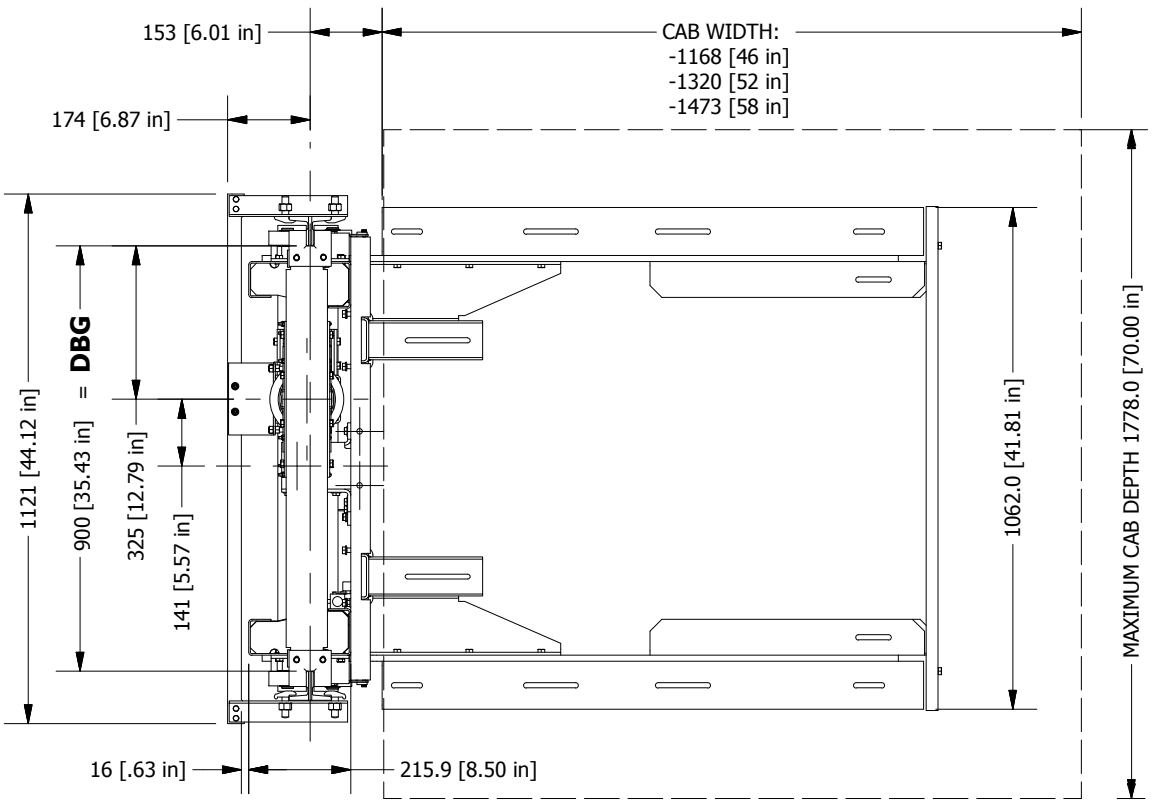

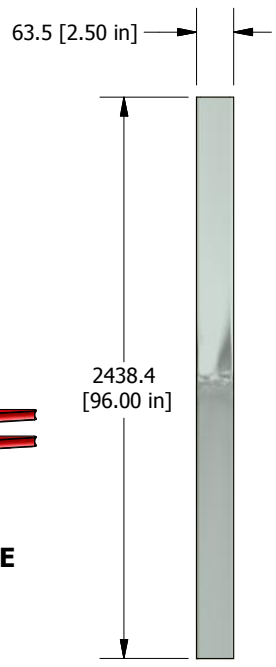

PILLAR

DEAD END HITCH (D.E.H.)

ROPE SHACKLE SET: ATTACHMENT TO D.E.H.

ROPE SHACKLE SET: ATTACHMENT TO CAR FRAME

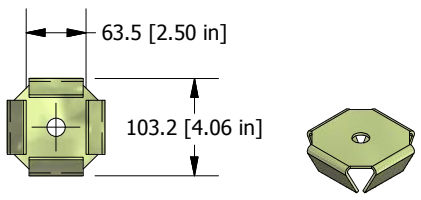

JACK/PILLAR CUP

CAR FRAME LOADS		
	LB	*Kg*
CAPACITY	1400	636
MAX. GROSS LOAD	2800	1273
CAR WEIGHT	924	420
CAR FRAME WEIGHT	434	197
PULLEY ASSY. WEIGHT	42	19

MAX. SPEED	0.2 m/sec - 40FPM
SAFETY TYPE	Instantaneous (Type A)
GUIDE TYPE	ISO T89B
NUMBER OF ROPES	NO. 2 Ø3/8" (10mm)
GUIDE ROLLERS	NO.4 Ø 80mm
PULLEY DIAMETER	12.00" (305mm)
MAX. CYLINDER DIA.	4-1/2" (114mm-90mm Piston)
MIN. PIT DEPTH	*14.00" (356mm)

NC SAFETY LIMIT SWITCH INCLUDED - MANUAL RESET

* 14 in PIT BASED 4in PLATFORM (INCLUDING SILL) WITH 3 in RUNBY

MAXIMUM CAB PLATFORM
AREA = 18 SQFT.

2:1 Indirect Acting DBG:900mm [35.43 in.]

CAR FRAME MODEL - 701 [8 FT]

OLS PART NO. 119050

REVISION 1

A GMV PARTNER
OLS-NA